TERMINALE TOUCH SCREEN FLYNET50

TOUCH SCREEN INDICATOR FLYNET50

- **Display a colori 5,7" touch screen Backclight a LED** / *5,7" touch screen colour display*
- **Case in VOPC/ABS, antistatico, ignifugo, resistente ai raggi UV** / *Case in VOPC/ABS antistatic, flame retardant, UV resistant*
- **IP20, pannello frontale IP65** / *IP20 case, IP65 front panel*
- **Data Base SQL** / *SQL data-base*
- **Esportazione file CSV via rete, USB** / *Exporting CSV files through network, USB*
- **Archiviazione pesate in PDF** / *Weighing operations archiving in PDF format*
- **Alimentazione 12V** / *Power supply 12V*



Codice *Code*	**Descrizione** *Description*
T00426	FLYNET50 Analogico 5V / *FLYNET50 analogue 5V*
	Options
OC1632	Kit per fissaggio a parete / *Wall mounting kit*
OC2574	Gateway PROFINET (esterno) / *Gateway PROFINET*
OC2737	Scheda 8 Inputs / 12 Outputs / *8 Inputs / 12 Outputs card*
OC1647	Morsettiera per scheda 8 Inputs / 12 Outputs / *Indicator block for 8 Inputs / 12 Outputs card*
OC0984	Scheda 4-20mA / 0-10V, nr. 2 ingressi contaimpulsi 2Khz / *4-20mA / 0-10V card, no.2 pulse counter inputs 2Khz*
OC0985	Scheda WIFI esterna / *External WIFI card*
OC2749	Scheda spansione uscita HDMI / *HDMI card*
OC0986	Radio modem 869Mhz (portata fino a 2 km) / *Radio modem 869Mhz (range up to 2 km)*
OC1077	MPP aliby memory / *MPP alibi memory*
OC2762	Scheda seconda bilancia / *Second scale card*
OC1648	Software per Stampa in formato A4 e PDF / *A4 and PDF print software*

FLYNET collegabile a stampante (pag. 70) / *FFLYNET can be connected to a printer (page 70).*

Caratteristiche tecniche / *Specifications*	
Alimentazione / *Power supply*	12Vdc - 5A, 110 - 240 Vac con alimentatore esterno / *12Vdc - 5A, 110 - 240 Vac with external power supply*
Processore / *Processor*	1 Ghz, 512 Mbyte RAM, 1 Gbyte flash memory / *1 Ghz, 512 Mbyte RAM, 1 Gbyte flash memory*
Display / *Display*	Touch screen 5,7" a colori, tecnologia TFT, backlight a led / *5.7" Touch screen colour display,TFT technology, LED backlit*


Porte di comunicazione / *Communication ports*
Ethernet 10/100 MBps / *Ethernet 10/100 MBps*
Nr. 1 Uscita HDMI opzionale / *No. 1 HDMI optional*
Nr. 4 porte USB host / *No. 4 USB host ports*
Nr. 3 uscite seriali RS232/RS422 / *No. 3 RS232/RS422 serial outputs*
Nr. 2 slots per espansioni: seriali, I/O digitali, Bus di campo, I/O analogici / *No. 2 expansions slots: serial, digital I/O, field bus, analogue I/O*

TERMINALE TOUCH SCREEN FLYNET50


TOUCH SCREEN INDICATOR FLYNET50

Bilance / *Scales*	
Nr. Bilance collegabili / *No. of connectable scales*	Fino a nr.2 bilance analogiche o digitali / *Up to no.2 analogue or digital scales*
Max. nr. di celle analogiche / *Max. no. of anal. load cells*	12 celle 350 ohm (12 + 12 per la versione duplex) / *12 load cells 350 ohm (12 + 12 for duplex version)*
Omologazione / *Display*	Approvazione CE fino a 6000 divisioni, Multirange: 3x3000 o 2x4000 / *CE approval up to 6000 divisions, Multirange: 3x3000 or 2x4000*
Alimentazione celle di carico / *Load cells power supply*	Celle analogiche: 5Vdc, celle digitali 10-18Vdc / *Analogue load cell: 5Vdc, digital load cell 10-18Vdc*
Convertitore A/D / *A/D convertor*	Sigma Delta 24 bits, filtri digitali, alim. 5Vdc, 6 fili (sensing alim. celle) / *Sigma Delta 24 bits, digital filtering, 5Vdc power supply, 6-wire connection*

Versione da tavolo / *Tabletop versin*

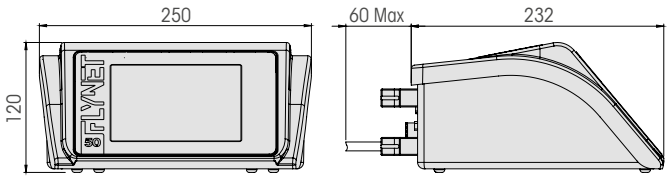

Fissaggio a parete / *Wall mounting*

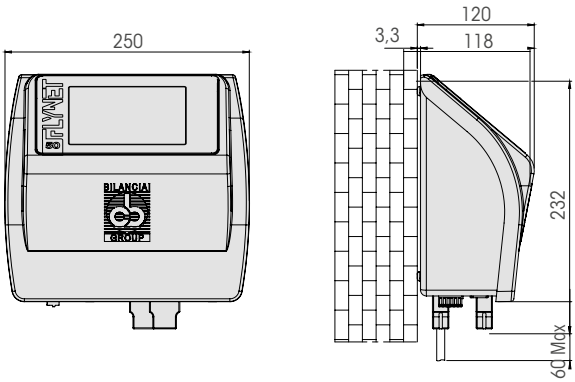

Agent / Dealer

SOCIETA' COOPERATIVA BILANCIAI
Strumenti e Tecnologie per Pesare

Società Cooperativa Bilanciai Campogalliano
41011 Campogalliano (MO) Italy - Via S. Ferrari, 16 - Ph. +39 059 893611 - Servizio Assistenza Clienti - Ph. +39 059 893612 - **www.coopbilanciai.it - info@coopbilanciai.it**